




## ISOmod Power Switch Module Kit - P/N 19743

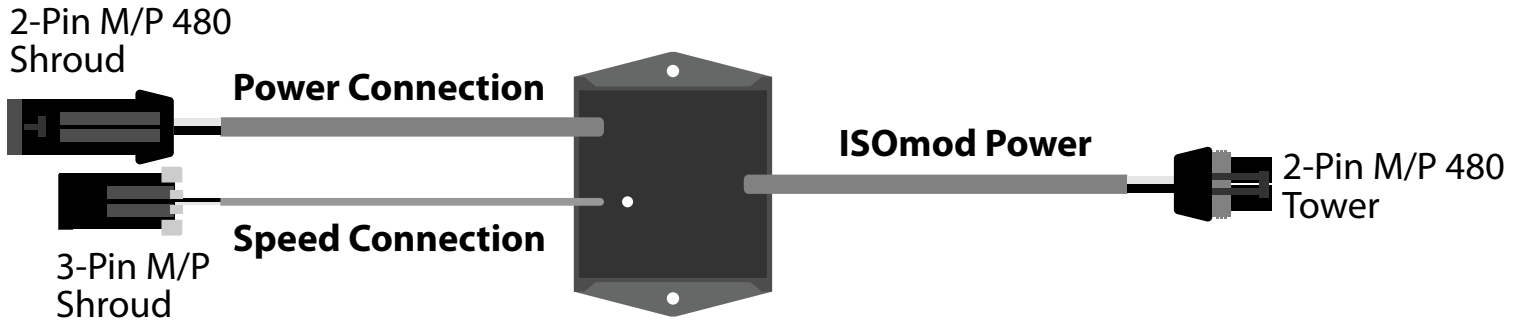

### Overview

This module controls the supply of electricity to the ISOmod preventing battery drain when not in use. When vehicle voltage is present at the accessory power line at the Speed Connection, a relay turns on main power to the ISOmod - and vice versa. A green LED on the potted enclosure will light when power is turned on to the ISOmod.

### Installation

1. Disconnect the battery power at the ISOmod harness and connect it to the Power Connection on the ISOmod Power Switch Module.
2. Connect the ISOmod Power output from Power Switch Module to the Power input at the ISOmod harness.
3. Connect the Speed output from the ISOmod harness to the Speed Connection at the Power Switch Module.  
**Note:** if the Speed input on the ISOmod harness is already in use, install a "Y" cable - available from Micro-Trak, PN 18048.